INSTALLATION MANUAL
67492P Sensor

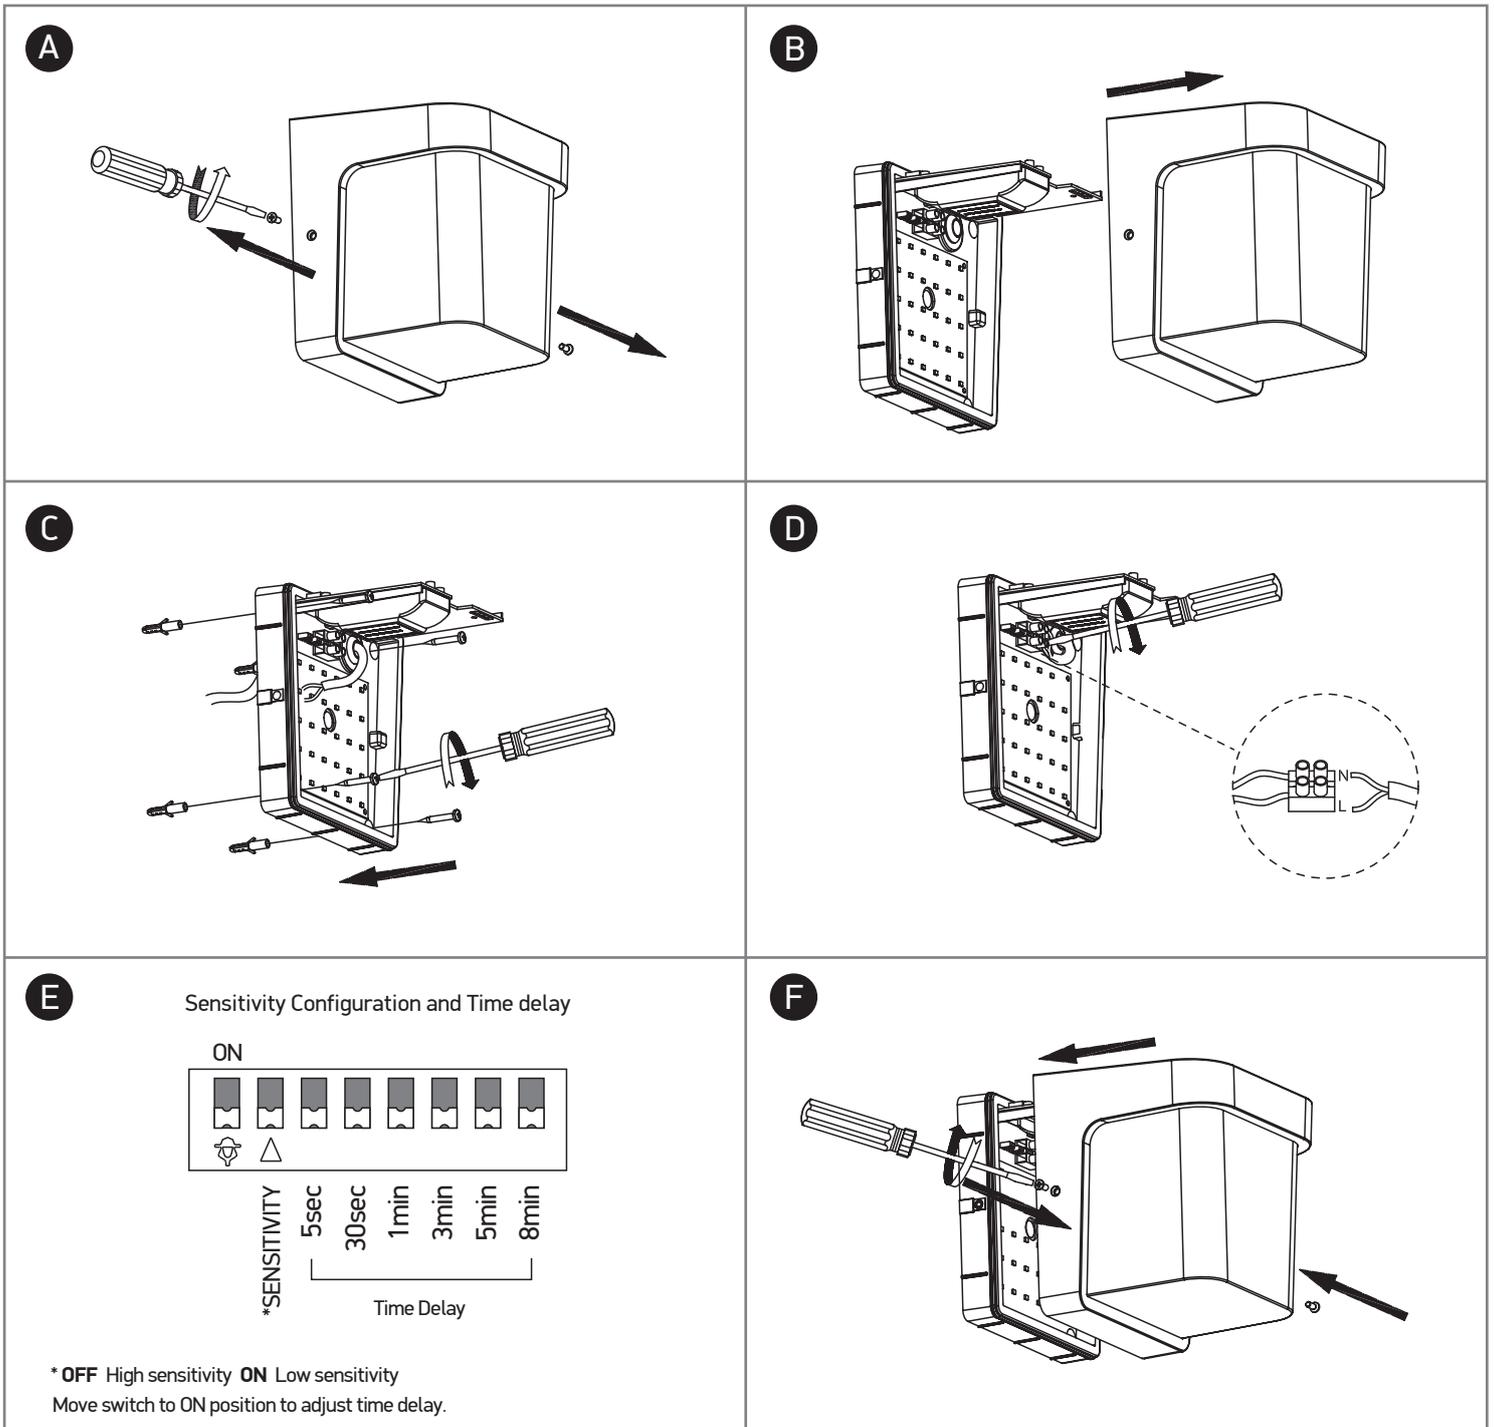**230**V | SMD **2835** | **12**W | IP**54** | Sensor | Plastic + PC | Complete with 300mA driver. | **80** CRI

140mm
170mm
170mm

one LIGHT

A

B

C

D

E Sensitivity Configuration and Time delay

ON

*SENSITIVITY	5sec	30sec	1min	3min	5min	8min

Time Delay

* **OFF** High sensitivity **ON** Low sensitivity
Move switch to ON position to adjust time delay.

F

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.

www.1-light.eu