


INSTALLATION MANUAL


89010L



230V | 50/60Hz | IP20 | Adjustable Output
Adjustable output using DIP switches.

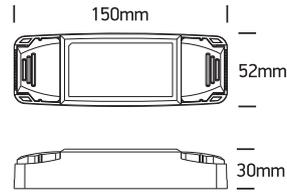

WIRING DIAGRAM

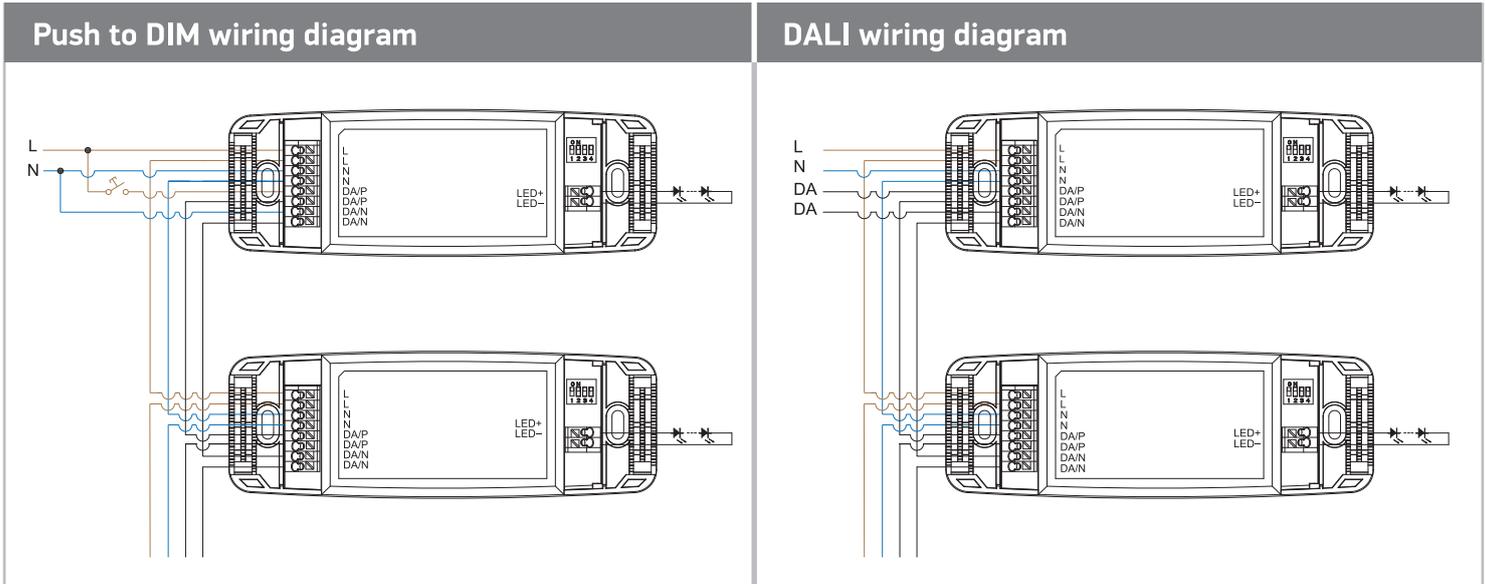

Specification							
Input Voltage & Frequency	230V AC 50/60Hz						
Power Factor	≥0.90						
Operating Temperature	Ta: -20°C ~ +50°C			Tc: +75°C			
Output Current	200mA	230mA	250mA	300mA	350mA	400mA	500mA
Output Voltage	6-41V	6-41V	6-41V	6-41V	6-36V	6-32V	6-25V
Output Power (Max.)	1,2-8,2W	1,38-9,43W	1,5-10,25W	1,8-12,3W	2,1-12,6W	2,4-12,8W	3-12,5W

LED Current & Voltage Selection

The driver's output current and voltage can be selected by adjusting the DIP switches.

Warning: Before use, make sure the correct output current or voltage is set.

Push to DIM

Press and hold to DIM

- **ON/OFF:** short push (<0,5s).
- **Dimming:** press and hold (>0,5s).
- **Dimming up or down:** every time you press and hold, dimming changes direction.
- **Built-in memory:** light returns to the previous dimming level when is switched OFF and ON again, even after power failure.

Synchronization

Up to 64pcs LED drivers can be connected to the same push button. This means there is no need for any additional sync cables in large installations, where many drivers should be controlled by one push button.

If more than one driver is connected to the same push button, in order to achieve synchronization, the following action is required: **Press and hold switch for more than 15s. The system will synchronize and all the lights in the group will dim down to 50%.**

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.